



SRB



UNITIZED SPHERICAL ROLLER BEARING UNITS



COO

Non-expansion to expansion by moving snap ring

Contact seal allows up to +/- 2° of misalignment.

Stainless steel flinger

Durable one piece cast-iron housing with solid foot design

Two distinct locking systems are available. CROSSLOC™ adapter mount and setscrew collar mount


Same dimensions as SN5 or SAF plummer block

SN

Same O.D. size version as 22200 Series bearing

CROSSLOC™

Easy Mount & Dismount Patented Adapter Mount Locking System

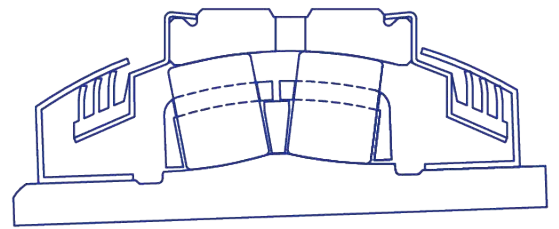

Triple lip seals allow for dynamic misalignment

CROSSLOC™ CXC

Same O.D. size version as CS setscrew lock

Scan QR code to connect to the information on site.

